


Data sheet

Flexible hoses
VMG—insulated hose

Edit. November 2008

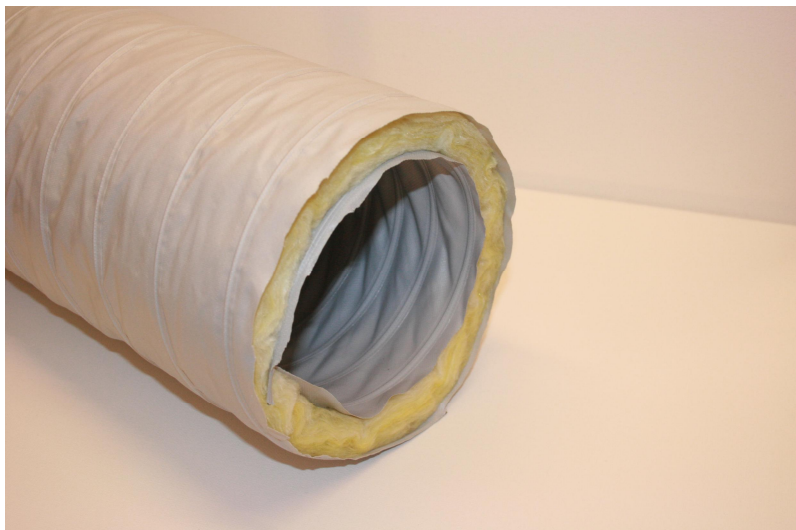

Technical data/composition:

- External hose material glass fabric coated with PVC
- Helix spring wire
- Glass felt 25 mm insulation(noncombustible) 16 kg/m³
- Internal hose material glass fabric coated with PVC
- Helix spring wire

Approvals: DIN 4102-1 B1/NFR92-501 M1

Temp. Range: -40 to + 90 Degr. C

Pre-insulated (25 mm or 50 mm on request) to avoid condensation.

Ventilation, air conditioning systems, refrigerating systems

Dimension mm (internal)	Weight/m(kg)	Max. Working pressure bar
102	0,715	1,5
127	0,860	1,0
152	0,955	1,0
162	1,140	1,0
202	1,715	0,8
252	1,830	0,7
315	1,915	0,7

Application areas: Suction of kitchen fumes, air from tumble dryers and other pure air transportation, where condensation might occur. Hoses are supplied in various standard lengths: 4 m. Other lengths and dimensions can be supplied upon request. Tests carried out at room temperature +20 degr. C

Vally Matic A/S
Park Allé 9-11
DK-6600 Vejlen

tel. +4575363344
Fax +4575364820
info@vallymatic.com
www.vallymatic.com

