


DATA

PUR Flexslange



Dec. 2017

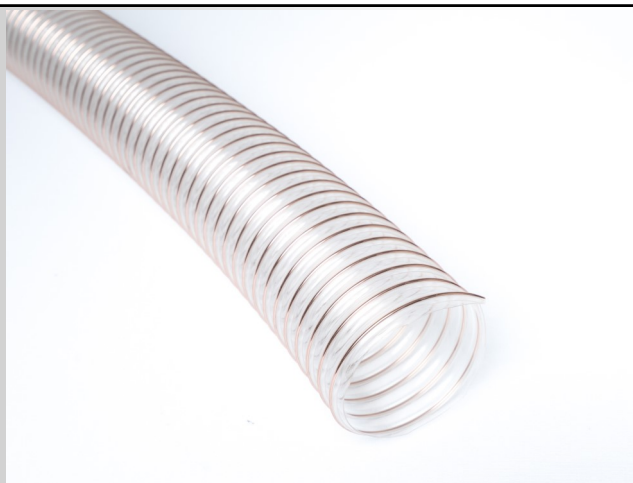

Applikationer:

- Ventilation,
- Punktudsugning
- Slidende partikler, støv etc.
- Undertryk

Tekniske data/opbygning:

- Polyurethan slange
- Kobberbelagt stålspiral
- Stor slidbestandighed
- God ozon bestandighed

Indvendig diameter mm	PUR 0.4mm Standard længde m	PUR 0.7mm Standard længde m
80	6, 10, 15	30
90	6, 10, 15	30
100	6, 10, 15	30
120	6, 10, 15	30
125	6, 10, 15	30
140	6, 10, 15	30
150	6, 10, 15	30
160	6, 10, 15	30
180	6, 10, 15	30
200	6, 10, 15	30
250	6, 10, 15	15
300	6, 10	15
350	6, 10	10
400	6, 10	10

Vally Matic A/S
Park Allé 11
DK-6600 Vejen

Tel: +45 75363344
E-mail: info@vallymatic.com

www.vallymatic.com